



A vertical, close-up photograph of a CNC machine tool head, showing various metallic components and a drill bit. The image is in a cool blue color palette and occupies the left side of the page.

Machine List

June 2024

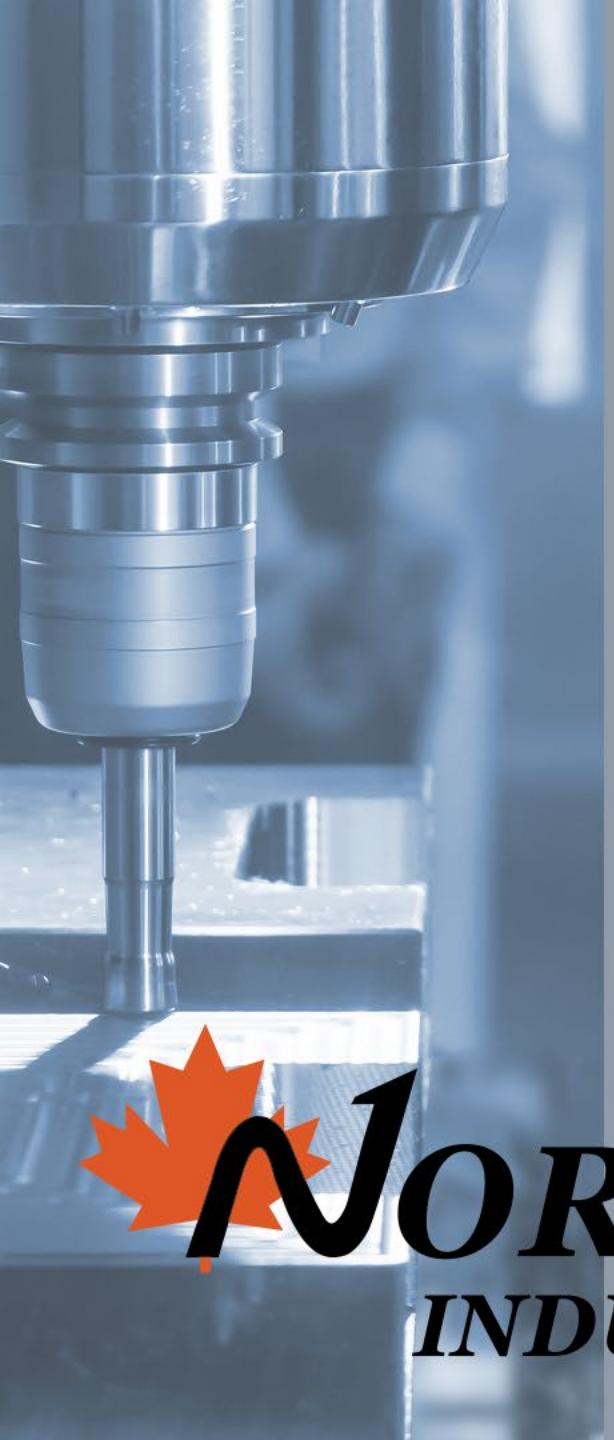

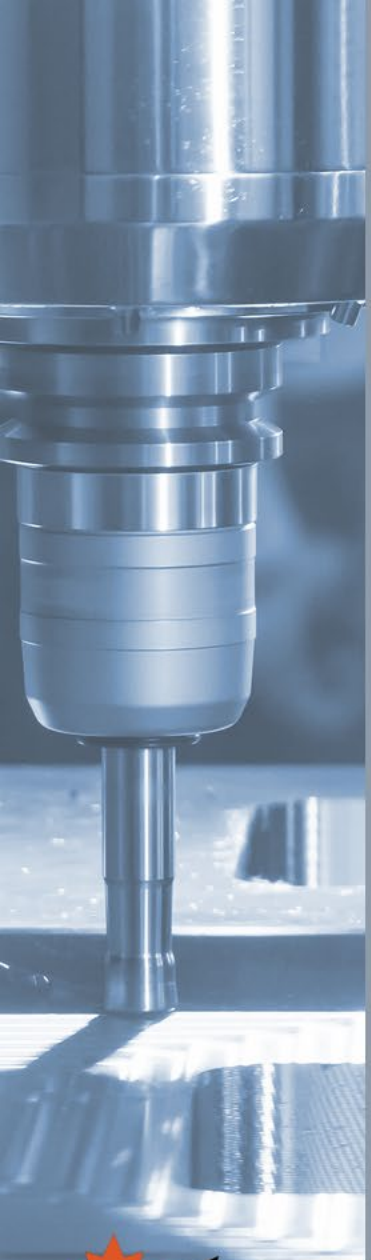

MACHINE SPECS

Qty: 1

Axes: 5

Travel: X 393.7", Y 31.496", Z 43.307"

Comments: CAT50 Spindle Taper,
30 Station Tool Changer, Right Angle
Milling Capability

MACHINE SPECS

Qty: 1

Axes: 5

Travel: X 197", Y 36", Z 32"


Comments: CAT50 Spindle Taper,
30 Station Tool Changer, Right Angle
Milling Capability

IBARMIA ZVH 55 EXTREME Milling Center



DMG DMF500 Milling Center



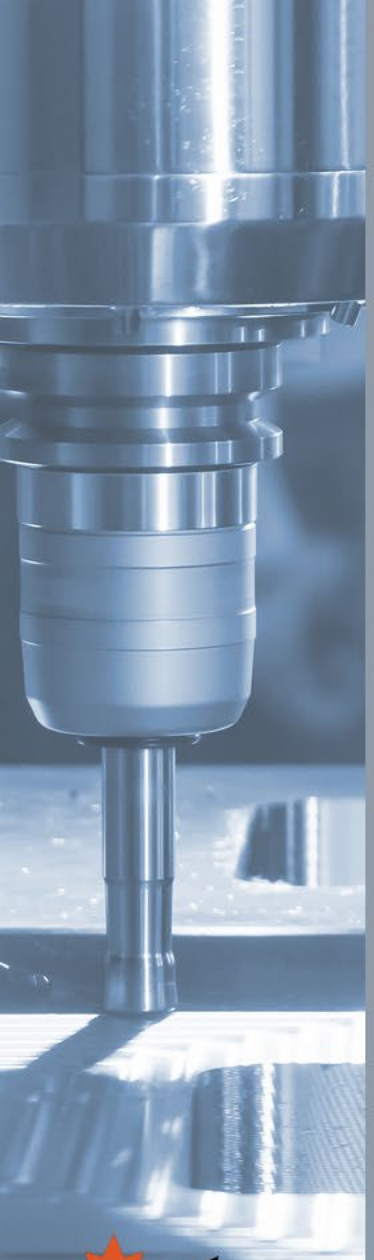

MACHINE SPECS

Qty: 1

Axes: 5

Travel: X 142", Y 36", Z 32"

Comments: CAT50 Spindle Taper,
30 Station Tool Changer, Right Angle
Milling Capability

MACHINE SPECS

Qty: 1

Axes: 5

Travel: X 70.866", Y 36", Z 32"


Comments: CAT40 Spindle Taper,
30 Station Tool Changer, Right Angle
Milling Capability

DMG DMF360 Milling Center



DMG DMF180 Milling Center



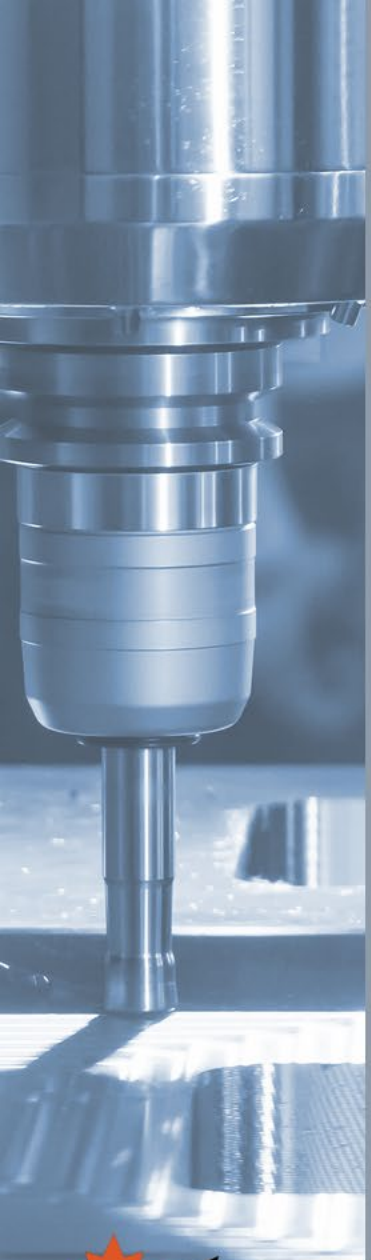

MACHINE SPECS

Qty: 2

Axes: 5

Travel: X 118", Y 31.5", Z 28.35"

Comments: CAT40 Spindle Taper,
30 Station Tool Changer, Right Angle
Milling Capability

MACHINE SPECS

Qty: 1

Axes: 4

Travel: X 60", Y 27.6", Z 25.6"


Comments: CAT40 Spindle Taper,
48 Station Tool Changer

MAZAK VTC 800 30SR Milling Center



MAZAK VCN 700D-40 Milling Center



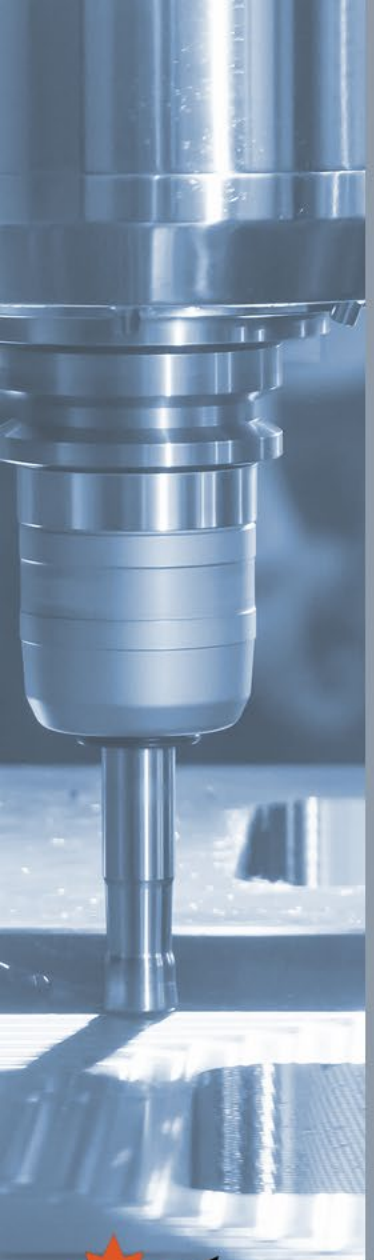

MACHINE SPECS

Qty: 1

Axes: 9

Swing: 42.13" - Bed Length: 160"

Spindle Bore: 10.24"

Comments: Twin Tandem Steady Rests
3.346"-13.779" (4 total), Long Boring Bar
Stocker (LBB) w/ Deep Boring Capability
Up To 40" Deep (Three Bar, 100mm (2)
and 80mm (1)

MAZAK INTEGREX E670 Turn & Mill Center



MACHINE SPECS

Qty: 3

Axes: 9

Swing: 26.38"


Bed Length: 78.74" (1), 118.11" (2)

Spindle Bore: 4.625"

Comments: Twin 15" Ø Chucks, Upper
& Lower Turrets (2), Steady Rest (2)
0.787"-6.496", 1.181"-9.645"),
Workpiece Transfer To Allow "Done In One"

MAZAK INTEGREX E420H Turn & Mill Center



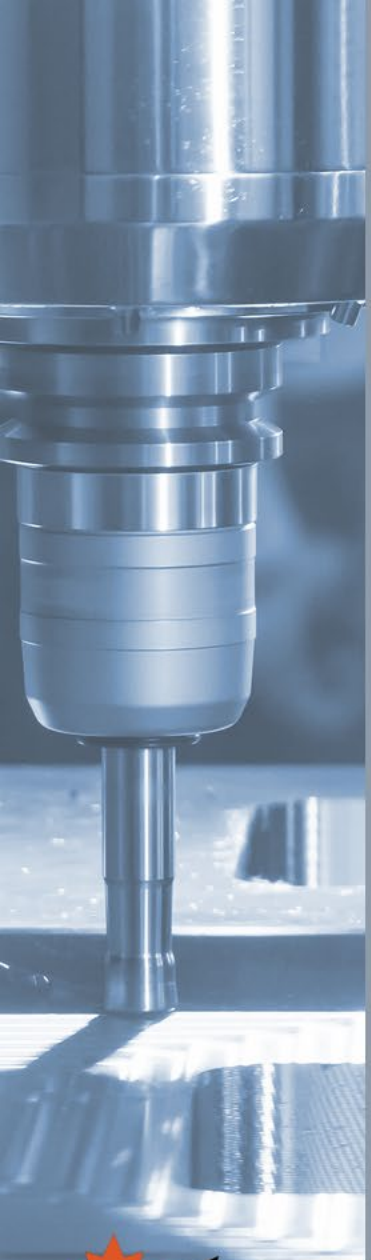

MACHINE SPECS

Qty: 1

Axes: 9

Swing: 33.5" - Bed Length: 60"

Spindle Bore: 4.060"

Comments: Twin 12" Ø Chucks,
Upper & Lower Turrets, Workpiece
Transfer To Allow "Done In One"

MACHINE SPECS

Qty: 1

Axes: 9

Swing: 25.91" - Bed Length - 60"

Spindle Bore - 4.060"


Comments - Twin 12" Ø Chucks,
Upper & Lower Turrets, Workpiece
Transfer To Allow "Done In One"

MAZAK INTEGREX IV 400ST Turn & Mill Center



MAZAK INTEGREX i400ST Turn & Mill Center



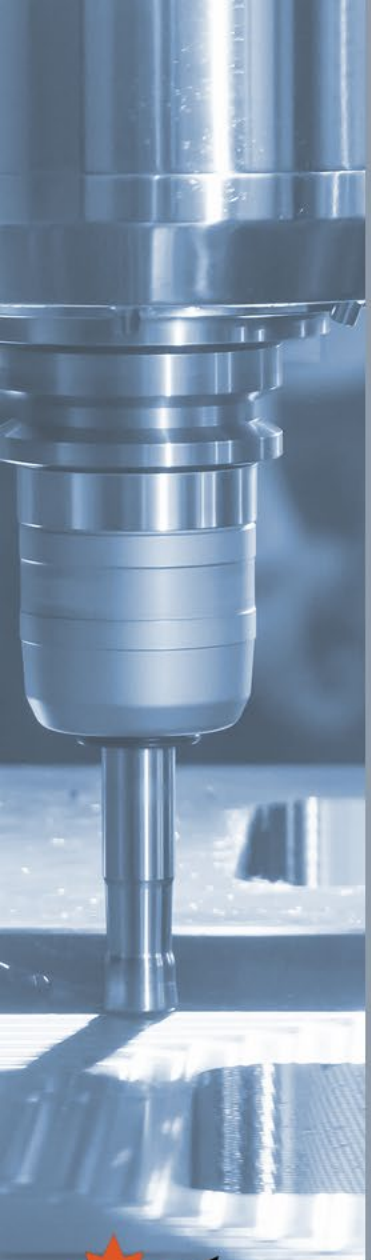

MACHINE SPECS

Qty: 1

Axes: 9

Swing: 30" - Bed Length: 60"

Spindle Bore: 3.195"

Comments: Twin 10" Ø Chucks, Upper & Lower Turrets, Workpiece Transfer To Allow "Done In One", 120 ATC

MAZAK INTEGREX IV 300ST Turn & Mill Center



MACHINE SPECS

Qty: 1

Axes: 2+1 (w/ Live Tooling)


Swing : 35.8" - Bed Length: 80"

Spindle Bore: 7.200"

Comments: CAT40 Spindle Taper, C-Axis Milling Capability, Milling Spindle 10HP, Steady Rest 1.771"-12.204"

MAZAK NEXUS SLANT TURN 500 Turn & Mill Center



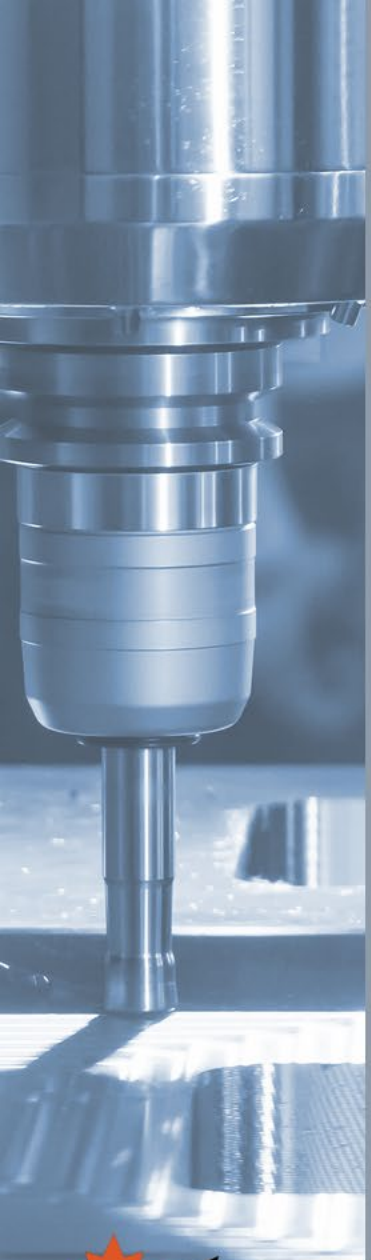

MACHINE SPECS

Qty: 1

Axes: 2+1 (w/ Live Tooling)

Swing: 35.8" - Bed Length: 120"

Spindle Bore: 10.800"

Comments: CAT40 Spindle Taper,
C-Axis Milling Capability, Milling Spindle
10HP, Steady Rest 1.771"-12.204"

MACHINE SPECS

Qty: 1

Axes: 2

Swing: 31.69"

Bed Length: 59.055"


Spindle Bore: 12.5"

MAZAK NEXUS SLANT TURN 550 Turn & Mill Center



MAZAK ST50N Turn & Mill Center



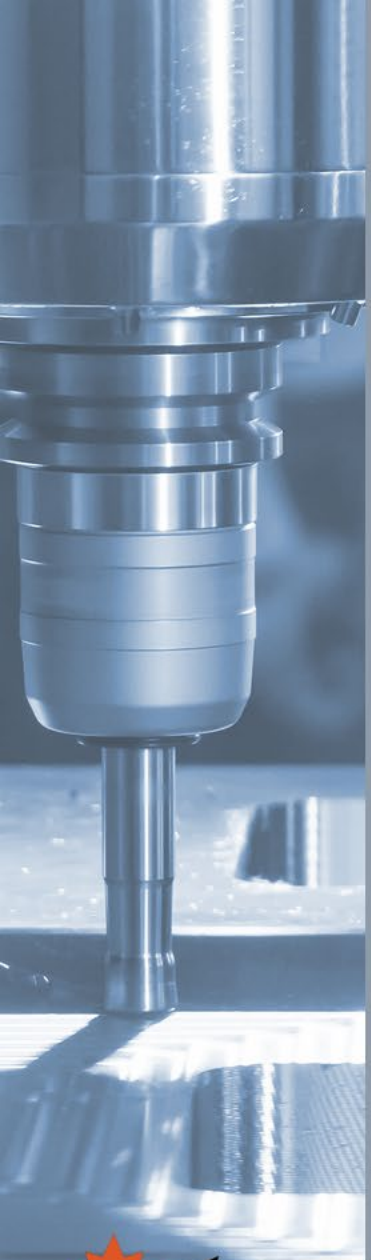

MACHINE SPECS

Qty: 1

Axes: 3+1 (Live Tooling, with 'Y' Axis)

Swing: 22.84" - Bed Length: 80"

Spindle Bore: 7.200"

Comments: 'Y' Axis Movement (± 4.0 "),
CAT40 Spindle Taper, C-Axis Milling
Capability, Milling Spindle 10HP, Steady
Rest 1.771"-12.204"

MAZAK NEXUS QTN450MY Turn & Mill Center



MACHINE SPECS

Qty: 3

Axes: 2+1 (w/ Live Tooling)


Swing: 22.84" - Bed Length: 60"

Spindle Bore: 7.200"

Comments: CAT40 Spindle Taper, C-Axis
Milling Capability, Milling Spindle 10HP,
Steady Rest 1.968"-7.874"

MAZAK NEXUS QTN450M Turn & Mill Center



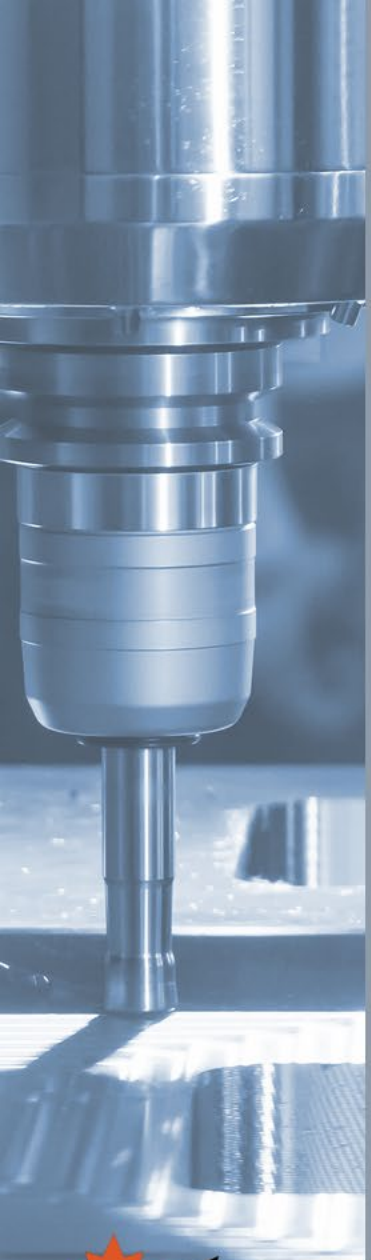

MACHINE SPECS

Qty: 4

Axes: 2+1 (w/ Live Tooling)

Swing: 33.80" - Bed Length: 120"

Spindle Bore: 10.800" (1), 7.200" (2), 5.200" (1)

Comments: Long Boring Bar(LBB) w/ Deep Boring Capability To 40" Deep (Two Bar, 100mm and 80mm), CAT40 Spindle Taper, C-Axis Milling Capability, Milling Spindle 10HP, S/Rest 1.771"-12.204", 3.346"-13.779"

MAZAK CYBERTECH 4500MT

Turn & Mill Center
w/ LBB



MACHINE SPECS

Qty: 1

Axes: 2


Swing: 24.409" - Bed Length: 76.77"


Twin Chucks: 500mm (19.68") Twin 6 Jaw Chucks, Twin Turret

Comments: Live Tooling On Centerline, Workpiece Transfer To Allow "Done In One"

MAZAK MULTIPLEX 650

High Production Turn &
Mill Centre

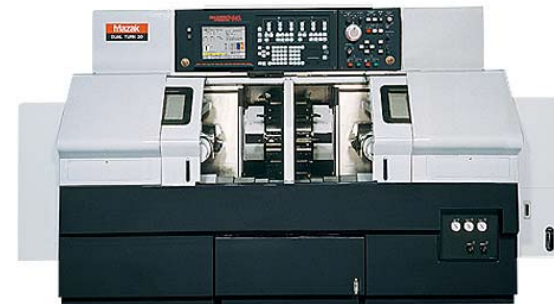

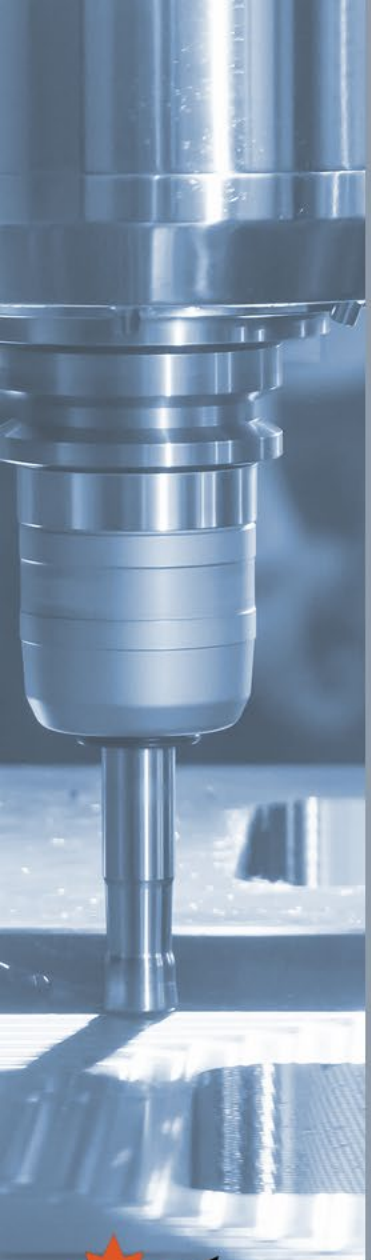

MACHINE SPECS

Qty: 2

Axes: 2

Swing: 12.5" Dia - Bed Length: 49"

Twin chucks: (1)10" Dia, (1) 8" Dia,

Twin Turrets

Comments: Gantry Loading System With
Parts Indexing Table, Workpiece Transfer
To Allow "Done In One"

MAZAK DUAL TURN 20RB

High Production Turn &
Mill Centre



MACHINE SPECS

Qty: 1

Swing: 31.1"


Spindle Bore: 7"

Comments: Hydraulic Steady Rest

JOHNFORD ST70D

Turning Center



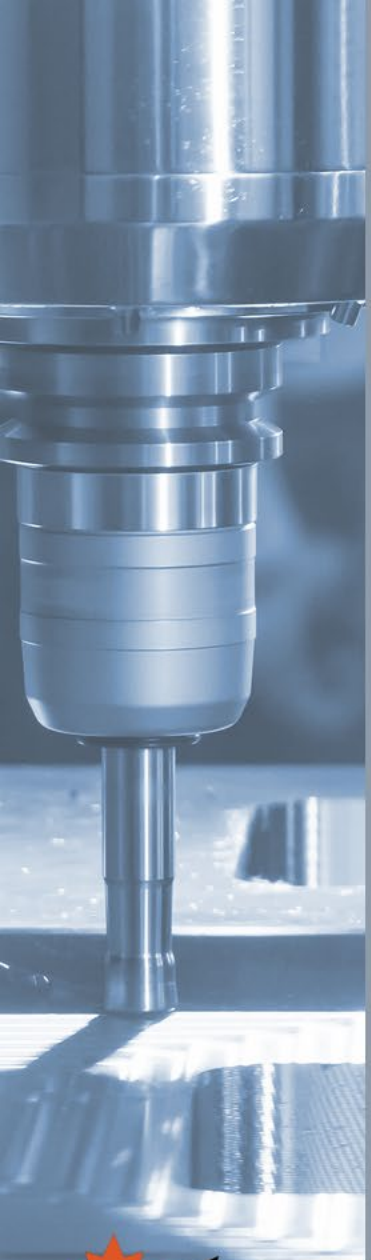

MACHINE SPECS

Qty: 1
Max. Swing: 30.7"
Max Turning Length: 47.2"
Chuck Main Spindle: 15"
Max Bar Work Capacity: 4"

MACHINE SPECS


Qty: 3
Axes: 2
Swing: 25.59"
Bed Length: 35.04" (2), 50.79" (1)
Spindle Bore: 6.300"

HYUNDAI L400C Turning Center



FORTUNE V-TURN 36 LSB Turning Center



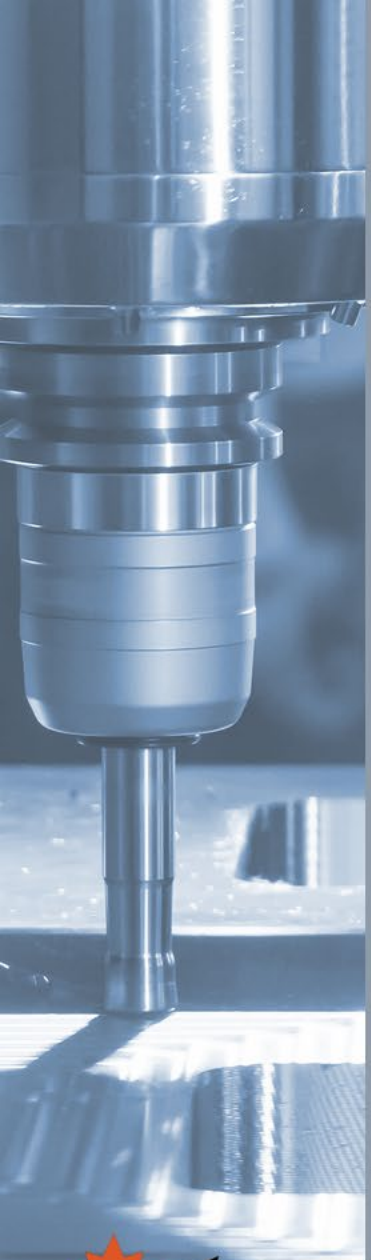

MACHINE SPECS

Qty: 1

Axes: 2

Swing: 43.300"

Bed Length: 177.170"

Spindle Bore: 14.250"

Comments: 6" Ø Deep Boring Bar Holder

WEILER E110 Control Cycle Lathe



MACHINE SPECS

Qty: 3

Axes: 2

Swing: 35.430"


Bed Length: (2)120.000", (1) 177.170"

Spindle Bore: (2)10.250", (1) 14.250"

Comments: 4" Ø Deep Boring Bar Holder

WEILER E90 Control Cycle Lathe



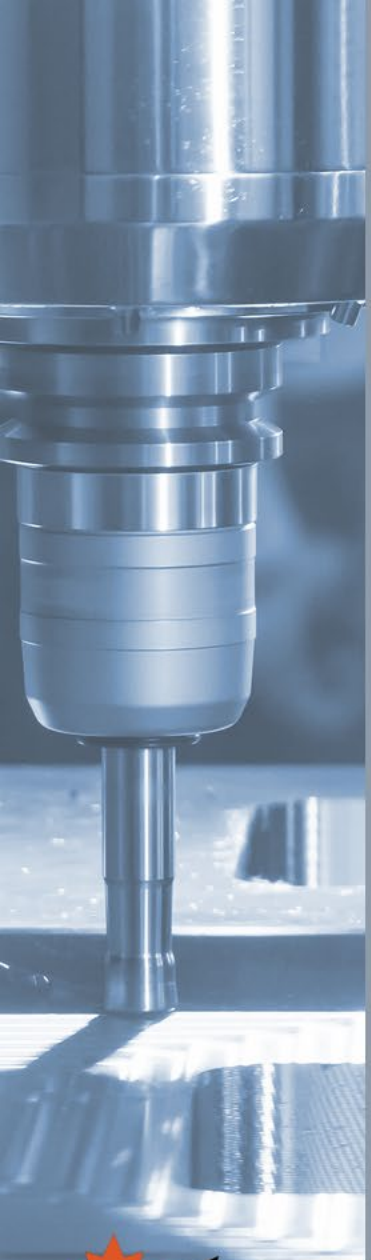

MACHINE SPECS

Qty: 6

Axes: 2

Swing: 28.340"

Bed Length: 120"

Spindle Bore: 8.500" (6)

Comments: 4" Ø Deep Boring Bar Holder

WEILER E70 Control Cycle Lathe



MACHINE SPECS

Qty: 5

Axes: 2


Swing: 22.440"


Bed Length: 80"

Spindle Bore: 3.250" (3), 6.500" (2)

Comments: 2.5" Ø Deep Boring Bar Holder

WEILER E50 Control Cycle Lathe

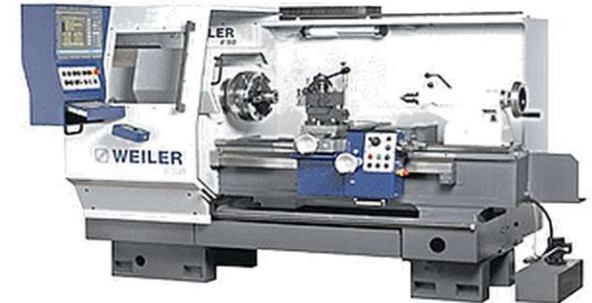

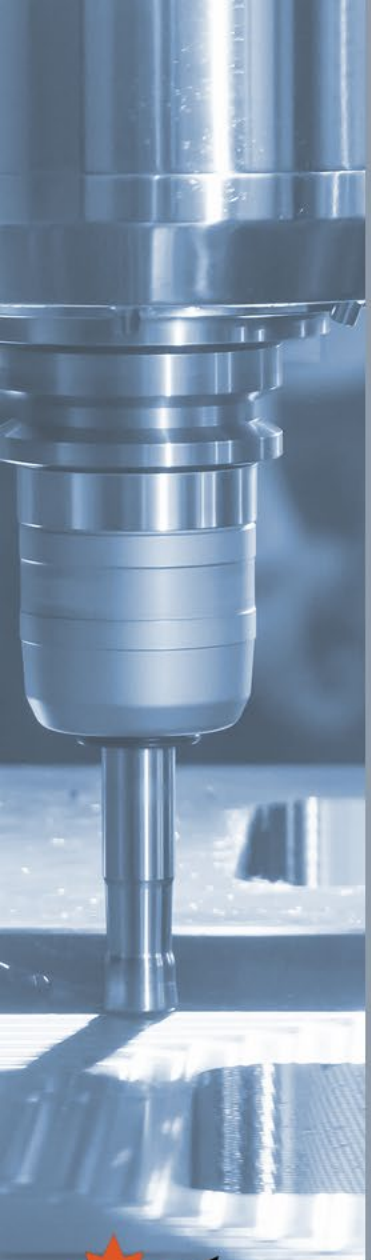

MACHINE SPECS

Qty: 1
Axes: 2
Swing: 21.06"
Bed Length: 80"
Spindle Bore: 2.790"

MACHINE SPECS


Qty: 1
Axes: 2
Swing: 27.560"
Bed Length: 120"
Spindle Bore: 4.130"

WEILER DA260 Manual Engine Lathe



STANKO 1M63 Manual Engine Lathe



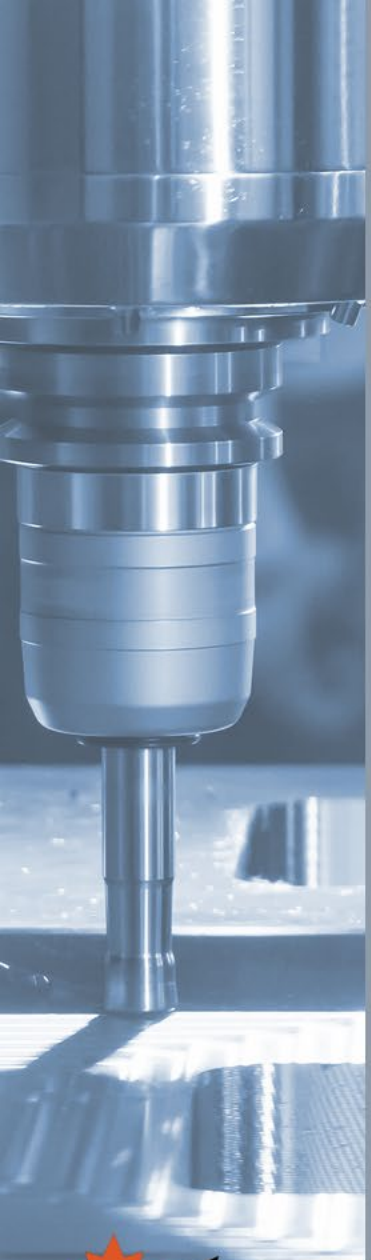

MACHINE SPECS

Qty: 1
Axes: 2
Swing: 33.07"
Bed Length: 120"
Spindle Bore: 4.130"

STANKO 16K40 Manual Engine Lathe




MACHINE SPECS

Qty: 1
Axes: 3+1
Travel: X 60", Y 23", Z 23"
Comments: Fully programmable Tech-in style CNC Mill with ProtoTRAK control, c/w 4th axis, 40 Taper

TRAK FHM7 Control Cycle Mill



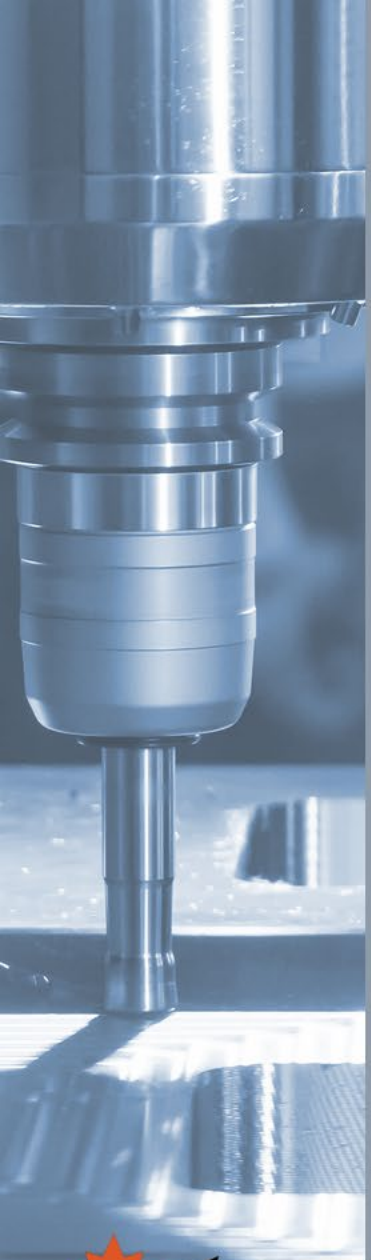

MACHINE SPECS

Qty: 1

Axes: 3

Travel: X 102.360", Y 39.37", Z 33.46"

Comments: 50 Spindle Taper,
Huron Style Head, Ball Screws, Outriggers

KIHEUNG U7 Manual Mill



MACHINE SPECS

Qty: 1


Axes: 3

Travel: X 52", Y 13.6", Z 24.8"

Comments: 50 Spindle Taper, Quill Feed,
Head Swivel L/R 45°

STANKO BGV 450 Manual Mill



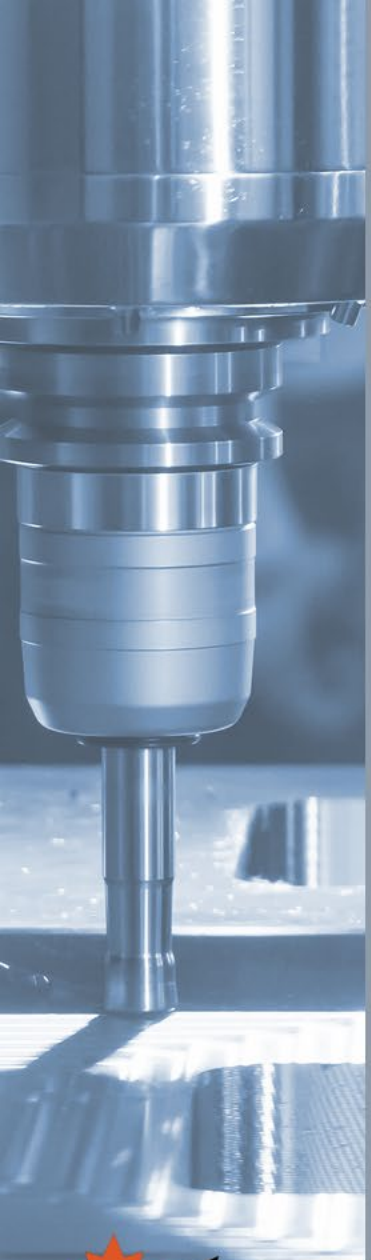

MACHINE SPECS

Qty: 2

Axes: 3

Travel: X 36", Y 20", Z 27.5"

Comments: 40 Spindle Taper, Quill Feed,
Head Swivel L/R 45°

MODERN MODEL 1654

Manual Mill



MACHINE SPECS

Qty: 1


Length: 8 Meter

Comments: Rotating Workpiece, Counter
Rotating Tool, BTA Drill (1.5" to 6.0" Ø)
& Pull Boring (3.0" to 8.0" Ø), 8.5" Spindle
Bore w/ Lantern Chuck

UNISIG B600R

Deep Hole Drilling Machine



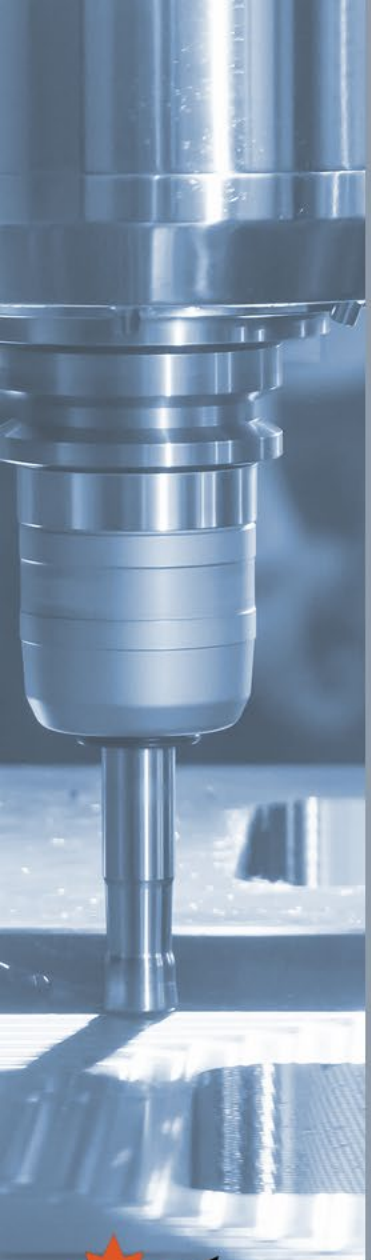

MACHINE SPECS

Qty: 1

Travel: 314.96" Stroke (8 Meter)

Hone sizing: 1" to 22.5" (Currently Tooled Up For 2" to 12" Ø)

Comments: Superabrasive Honing Machine capable of Large Material Removal Rates

SUNNEN HTD-8300W

Honing Machine



MACHINE SPECS


Qty: 1

Comments: Fully Programmable Twin Column Bandsaw w/ 15.75" Ø Capacity

KASTO TWIN A4

Automatic Saw



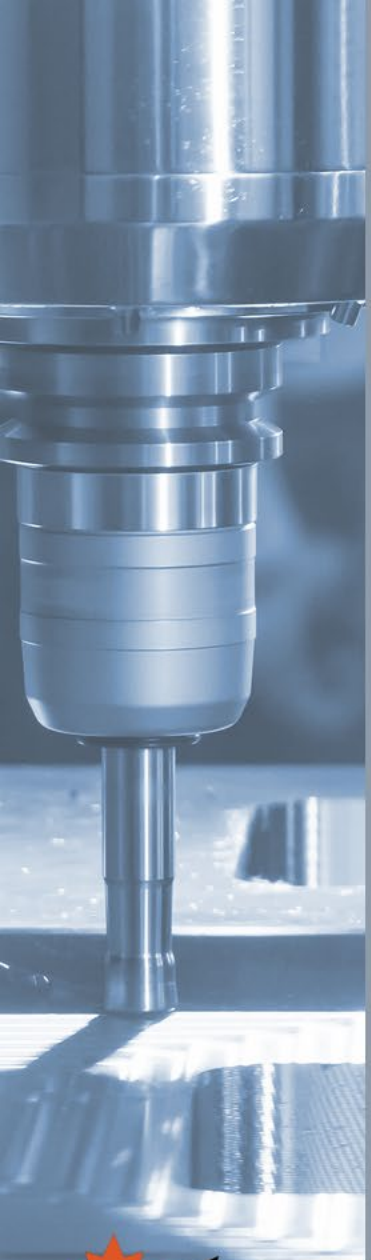

MACHINE SPECS

Qty: 1

Comments: Fully Programmable Twin Column Bandsaw w/ 15.75" Ø Capacity

KASTO TWIN AE4 Automatic Saw




MACHINE SPECS

Qty : 1

Comments: Fully Programmable Bandsaw w/ 13" Ø Capacity, Mitering 60° Left

HYD-MECH S20A SAW Automatic Saw



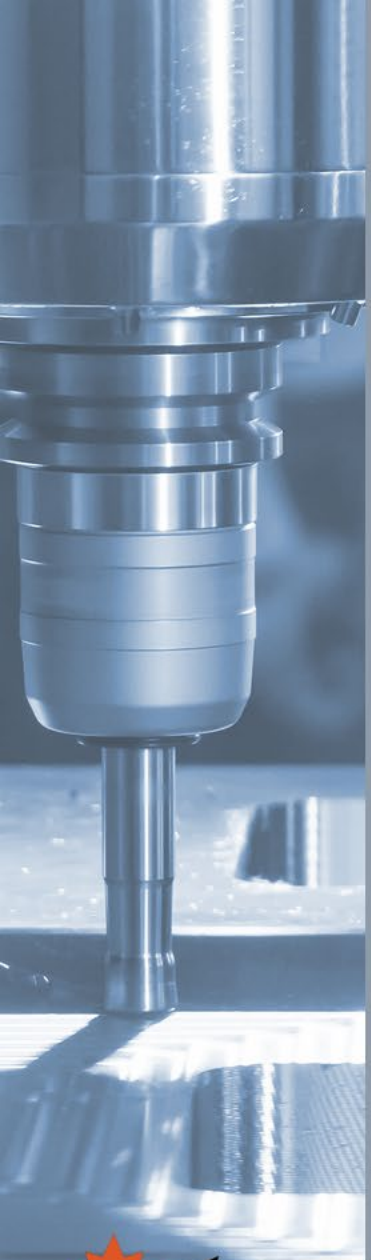

MACHINE SPECS

Qty: 1

Travel: X 94.48", Y 35.43", Z 27.56"

Comments: CMM In Temperature
Controlled Environment, Fully Automatic
Probing & Measuring Cycles, Accuracy to
0.0002"

ZEISS ACCURA Coordinate Measuring Machine





MACHINE SPECS

Qty: 1

Comments: WINCATT Torque Turn
Monitoring System With Optimum Torque
Accuracy Of +/-1%, Turns Accuracy Of
<1%, ATEX Certified Category 2 Chucking
Capacities 2 3/8" To 16", Torque Capacity
35,000 Ft.-Lb., Torque Capacity Break
35,000 Ft.-Lb.

MCCOY GLOBAL 16-1/2" Continuously Rotating Clincher Bucking Unit

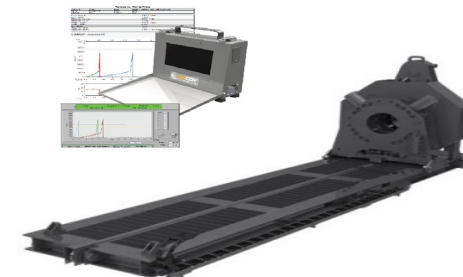

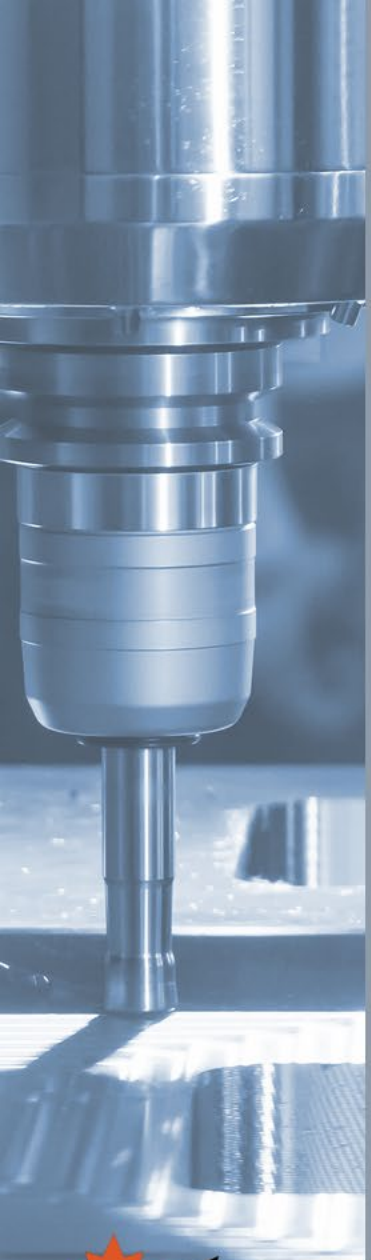

MACHINE SPECS

Qty: 1

Comments: Work Area Depth 36",
Work Area Height 36", Work Area Width
48", Shot Peening Glass Bead Media

MACHINE SPECS

Qty: 2

Comments: Tubing And Fittings Max
Rating To 5000 PSI and/or Tubing And
Fittings Max Rating To 10000 PSI, Digital
and Analog Test Charts

MANUS BOND MOD-U-BLAST


Pressure Dry Blast
Cabinet



WAINBEE / BARTON METER

Pressure Tester &
Digital Chart Recorder



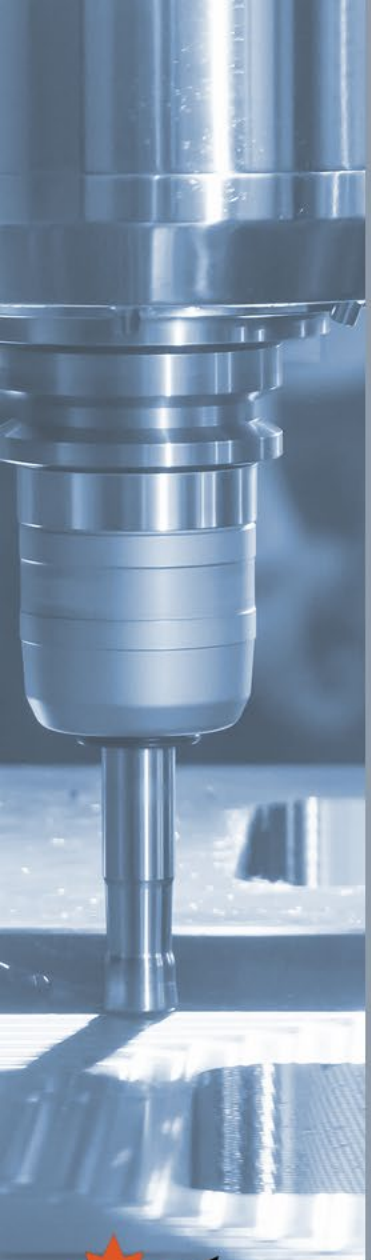

MACHINE SPECS

Qty: 1

Comments: Power 10 HP 3 Phase,
Bore 8", Stroke 12", Ram Speed
Sec/Inch – Return 26 IPM, Ram Speed
Sec/Inch – Press 20 IPM

MACHINE SPECS

Qty: 1

Comments: Power 2 HP 1 Phase,
Bore 1.75", Stroke 6", Ram Speed
Sec/Inch – Return 30 IPM, Ram Speed
Sec/Inch – Press 25 IPM

RK MODEL RK-HFP 100 H-FRAME


Hydraulic Press



SHURLIFT 30 TON

Hydraulic Press



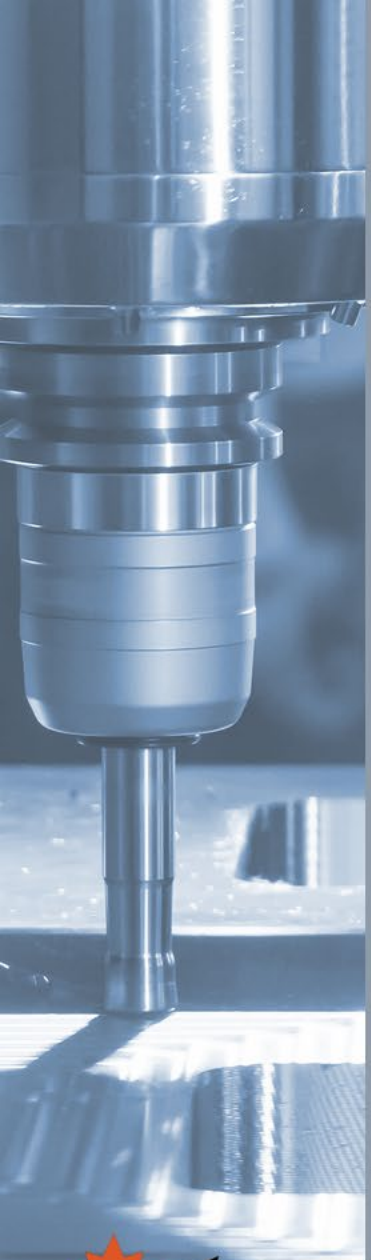


MACHINE SPECS

Qty: 1

Comments: Booth Dimensions
44' X 10' X 10' With an Air Make-up Unit to
Minimize Temperature Variations And
Remove Particles that compromise
Finish Quality.

SPRAY PAINT BOOTH



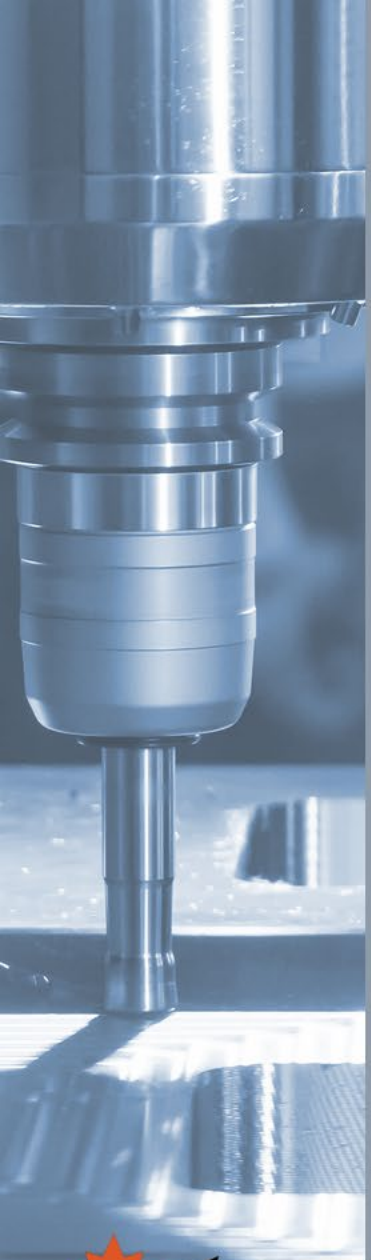

At Norquest, we know the importance of long-term business relationships. We believe in developing and fostering partnerships with our customers that are grounded in their metrics for success.

Address: 3911 74 Ave
Edmonton, Alberta, T6B 2Z7

Phone: 1-780-434-3322

Email: sales@norquestindustries.com

Website: www.norquestindustries.com

CONTACT NORQUEST

